







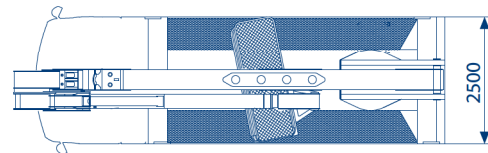


\* con jib chiusi / closed jib  
jib cerrados / jib fermees  
geschlossene jib

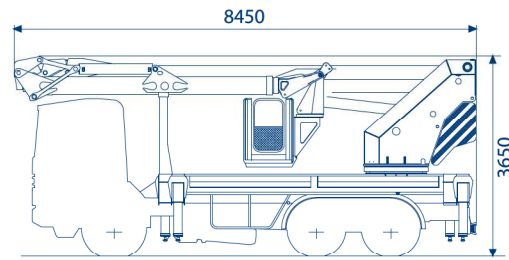

dati tecnici / specifications / datos técnicos  
caractéristiques techniques / technische daten

	35 m (280 kg)		30 m (400 kg)		elettroidraulici proporzionali proportional electrohydraulic electrohidráulico proporcional electrohydrauliques proportionnelles elektrohydraulisch proportional
	33 m (280 kg)		28 m (400 kg)		14,5 m
	26 m (280 kg)		19 m (400 kg)		3650 mm
	280 - 400 kg / 3 operatori - 3 operatori con jib chiuso 280 - 400 kg / 3 operators - 3 operators closed jib 280 - 400 kg / 3 operarios - 3 operarios jib cerrados 280 - 400 kg / 3 opératèurs - 3 opératèurs jib fermees 280 - 400 kg / 3 bediener - 3 bediener gesloten jib				8450 mm
	360°				2500 mm
	2400x800x h1100 mm acciaio allargabile a 3600mm 2400x800x h1100 mm steel extension to 3600mm 2400x800x h1100 mm acero extension a 3600mm 2400x800x h1100 mm acier extensible a 3600mm 2400x800x h1100 mm stahlkorb verbreiterbar auf 3600mm				idraulici su traverse estensibili idrauliche hydraulic on extensible hydraulic supports hidraulicos sobre soportes hidraulicos extensibles hydrauliques sur traverses extensibles hydrauliques hydraulisch ausfahrbaren querträgern
	350°				26 t

eagle 3526

